

ICON₂

Valve Integrated Pressure Regulator

Easy-to-Carry Handle and Protective Shroud

Master Shut-Off Valve

Flow Adjustment Dial (0-25 LPM)


Easy-to-Read Cylinder Contents Gauge

Anodized Barb for Cannula Delivery

50 PSI Constant Flow DISS Outlet

CGA 540 Fill Port

- Portable
- MRI Conditional 3 Tesla
- FDA 510(K) Cleared
- Manufactured in FDA-Registered Facilities

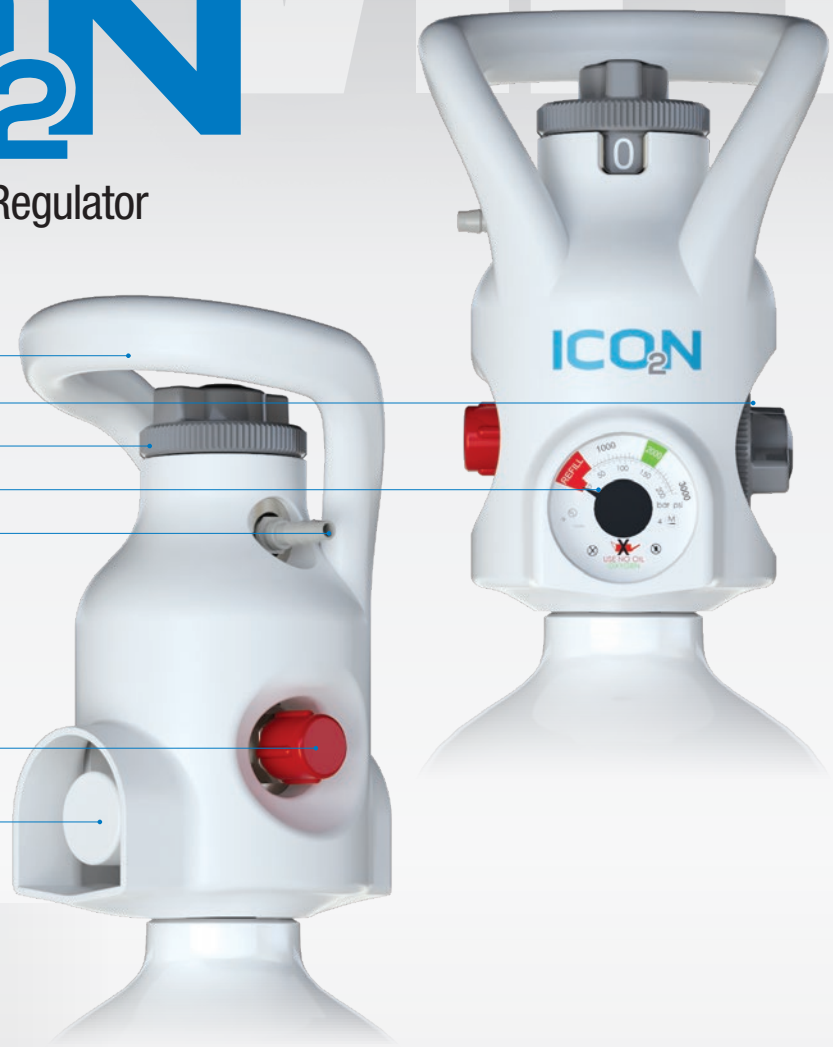

Product REF/ Model Number	Inlet Thread	Operating Pressure Range	Outlet Pressure	Outlet Flows	Auxiliary Port	Handle	Shutoff Valve	Fill Connection
1539116600-1	25E	0-24 MPa	345 kBa	0-25 L/min	None	ICON White Shroud	Yes	UNI 4406
1539117600-1	3/4-16 UNF-2A	0-2300 psig	50 psig	0-25 L/min	DISS 1240	ICON White Shroud	Yes	CGA 540
1539117700-1	25E	0-2300 psig	50 psig	0-25 L/min	DISS 1240	ICON White Shroud	Yes	CGA 540
1539117800-1	3/4-16 UNF-2A	0-2300 psig	50 psig	0-25 L/min	DISS 1240	ICON Green Shroud	Yes	CGA 540



800.233.1477 CDIVALVE.COM



control
devices
AN HBM COMPANY



800.233.1477 CDIVALVE.COM



control
devices
AN HBM COMPANY